


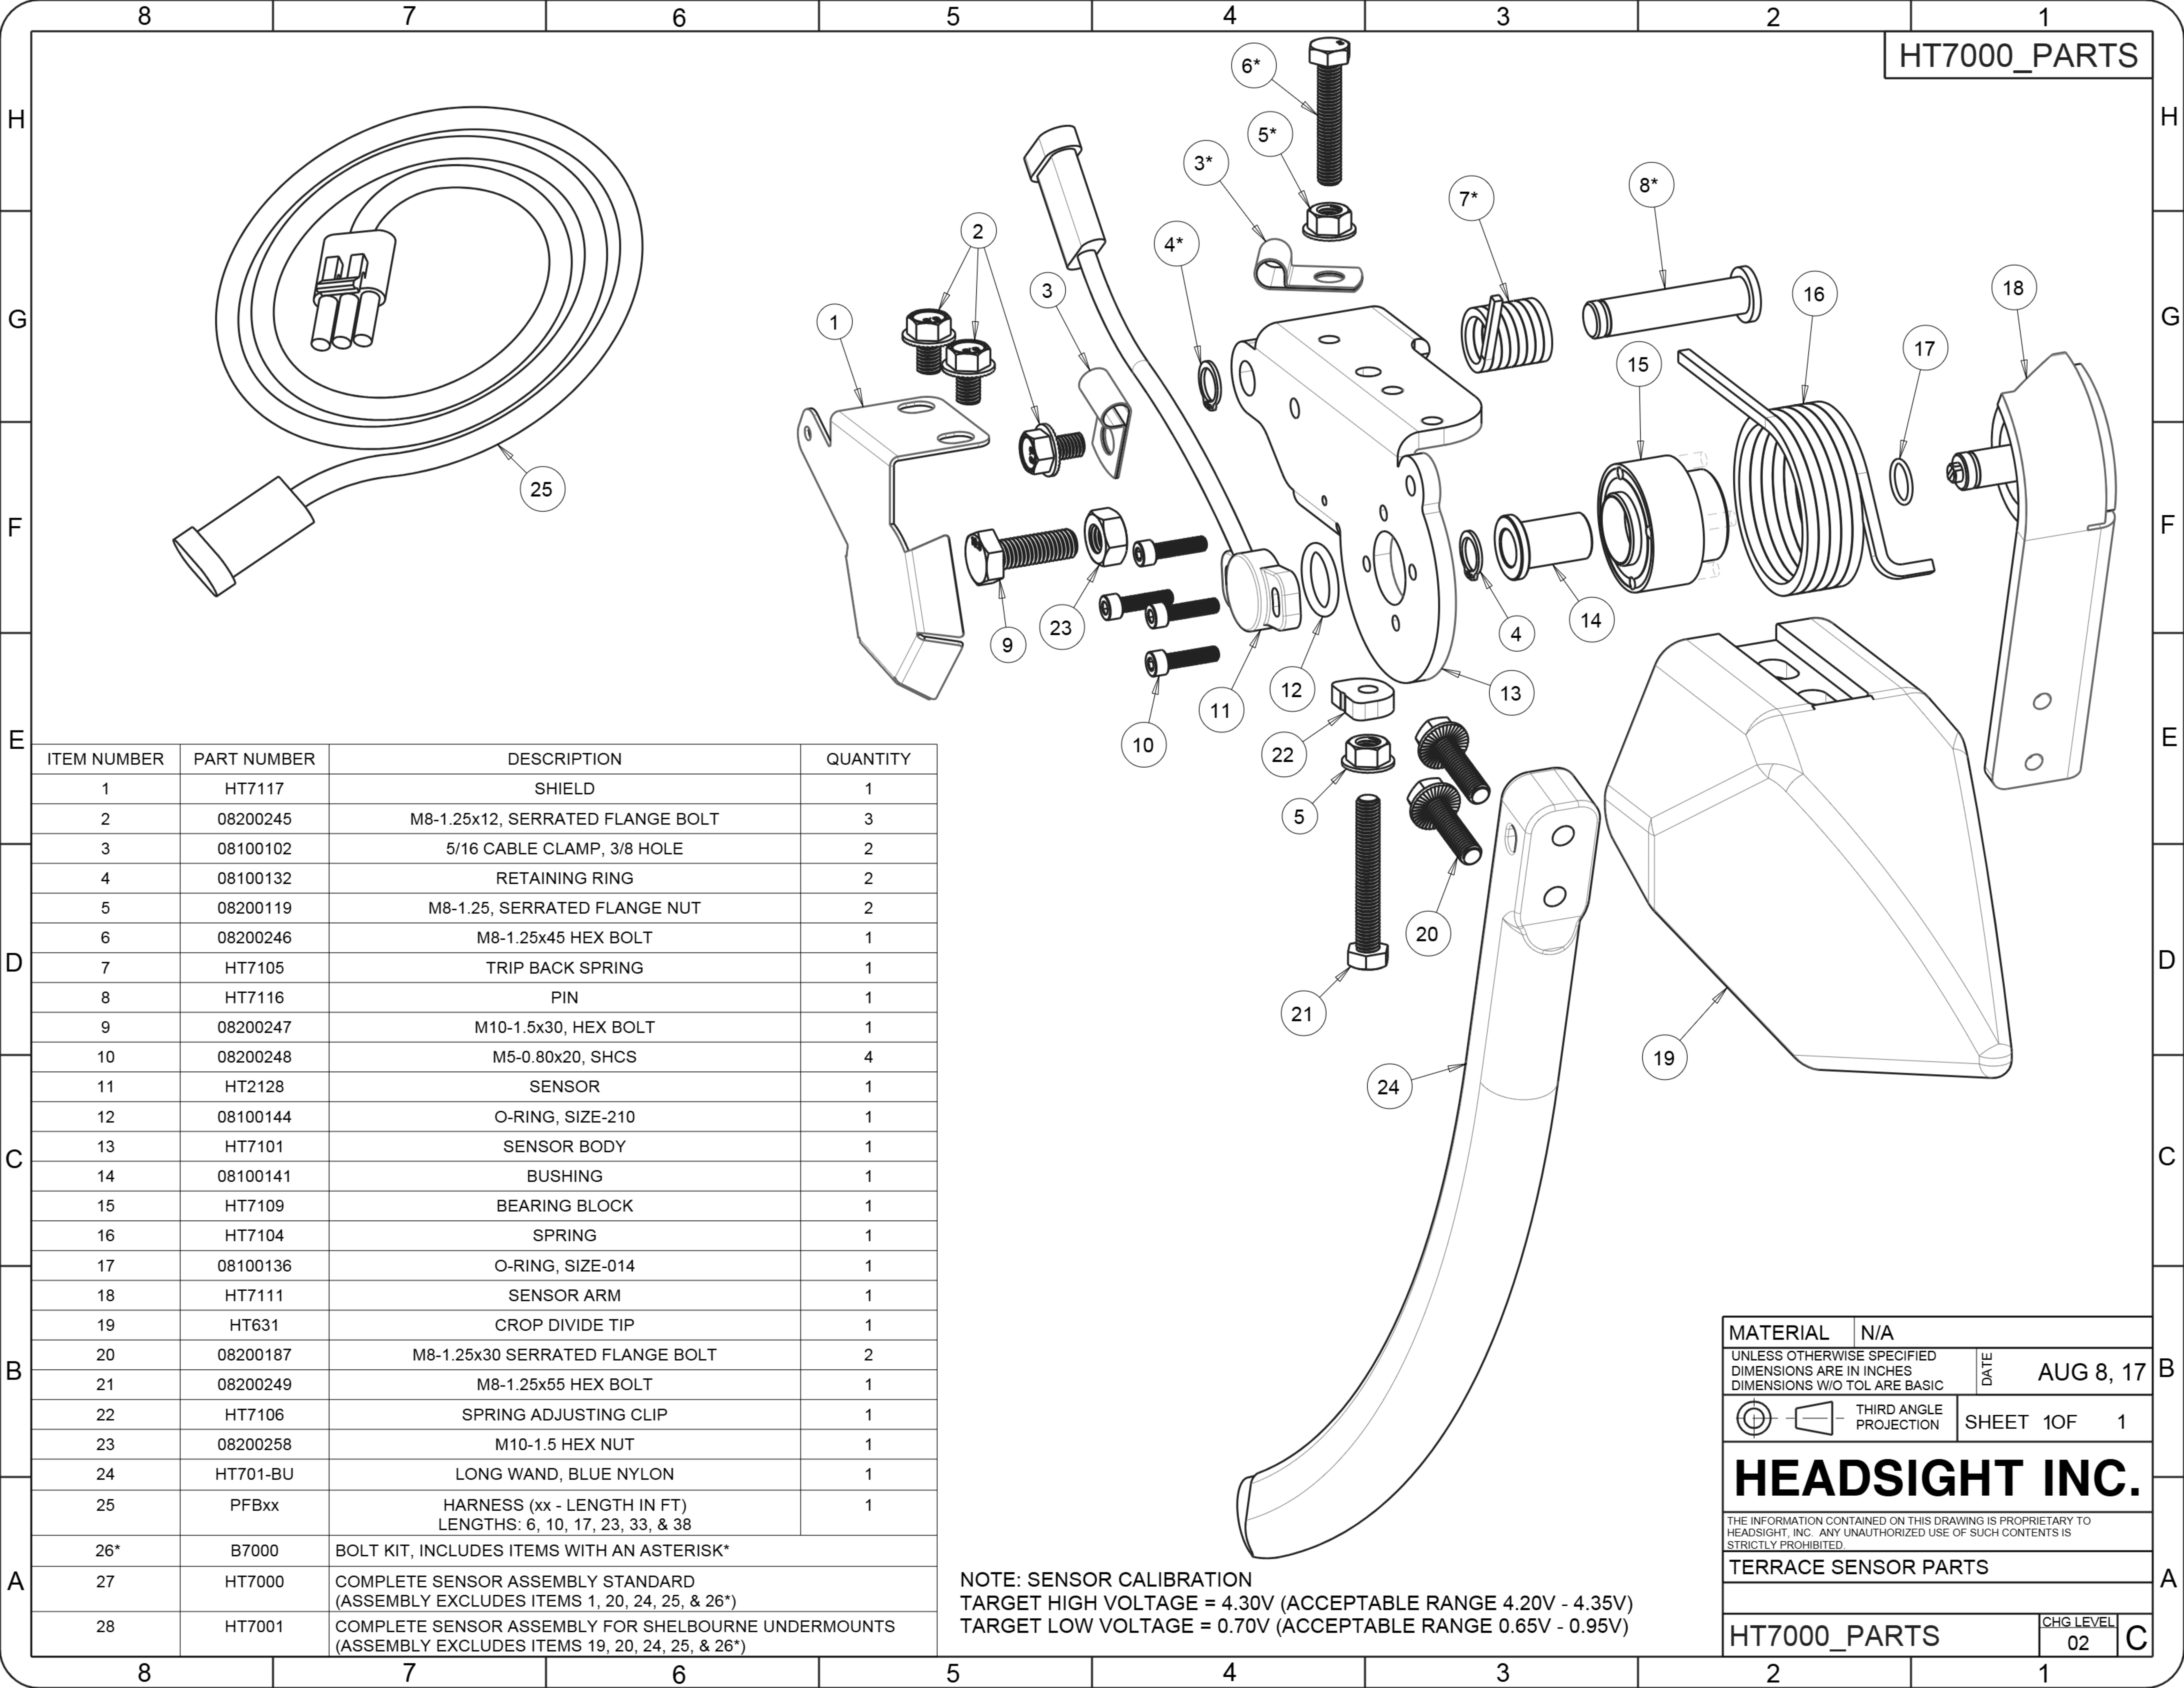

HT7000_PARTS

ITEM NUMBER	PART NUMBER	DESCRIPTION	QUANTITY
1	HT7117	SHIELD	1
2	08200245	M8-1.25x12, SERRATED FLANGE BOLT	3
3	08100102	5/16 CABLE CLAMP, 3/8 HOLE	2
4	08100132	RETAINING RING	2
5	08200119	M8-1.25, SERRATED FLANGE NUT	2
6	08200246	M8-1.25x45 HEX BOLT	1
7	HT7105	TRIP BACK SPRING	1
8	HT7116	PIN	1
9	08200247	M10-1.5x30, HEX BOLT	1
10	08200248	M5-0.80x20, SHCS	4
11	HT2128	SENSOR	1
12	08100144	O-RING, SIZE-210	1
13	HT7101	SENSOR BODY	1
14	08100141	BUSHING	1
15	HT7109	BEARING BLOCK	1
16	HT7104	SPRING	1
17	08100136	O-RING, SIZE-014	1
18	HT7111	SENSOR ARM	1
19	HT631	CROP DIVIDE TIP	1
20	08200187	M8-1.25x30 SERRATED FLANGE BOLT	2
21	08200249	M8-1.25x55 HEX BOLT	1
22	HT7106	SPRING ADJUSTING CLIP	1
23	08200258	M10-1.5 HEX NUT	1
24	HT701-BU	LONG WAND, BLUE NYLON	1
25	PFBxx	HARNESS (xx - LENGTH IN FT) LENGTHS: 6, 10, 17, 23, 33, & 38	1
26*	B7000	BOLT KIT, INCLUDES ITEMS WITH AN ASTERISK*	
27	HT7000	COMPLETE SENSOR ASSEMBLY STANDARD (ASSEMBLY EXCLUDES ITEMS 1, 20, 24, 25, & 26*)	
28	HT7001	COMPLETE SENSOR ASSEMBLY FOR SHELBOURNE UNDERMOUNTS (ASSEMBLY EXCLUDES ITEMS 19, 20, 24, 25, & 26*)	

NOTE: SENSOR CALIBRATION
TARGET HIGH VOLTAGE = 4.30V (ACCEPTABLE RANGE 4.20V - 4.35V)
TARGET LOW VOLTAGE = 0.70V (ACCEPTABLE RANGE 0.65V - 0.95V)

MATERIAL		N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS W/O TOL ARE BASIC		DATE	AUG 8, 17
		SHEET 10F	1
HEADSIGHT INC.			
THE INFORMATION CONTAINED ON THIS DRAWING IS PROPRIETARY TO HEADSIGHT, INC. ANY UNAUTHORIZED USE OF SUCH CONTENTS IS STRICTLY PROHIBITED.			
TERRACE SENSOR PARTS			
HT7000_PARTS		CHG LEVEL	02